
## SPIRE THE PRESCOT

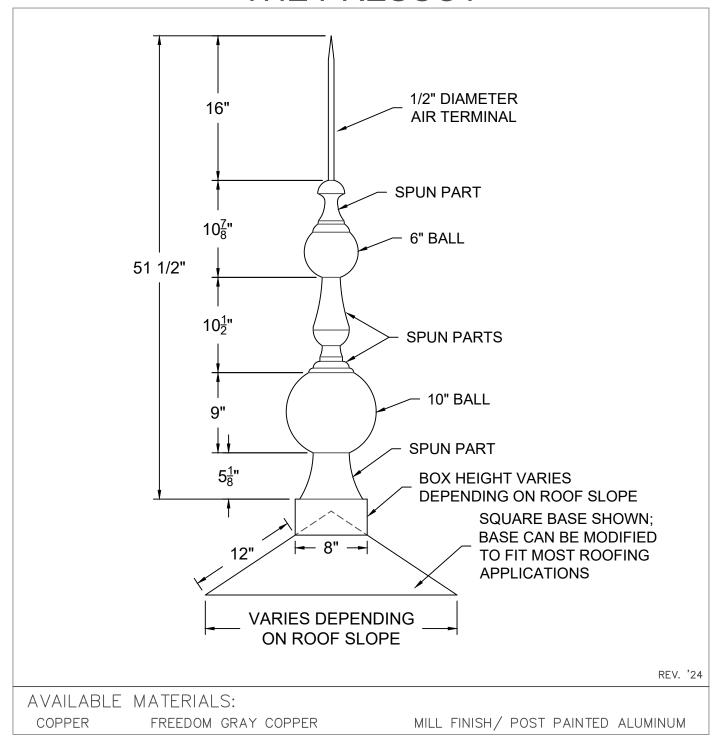

WEIGHT: VARIES DEPENDING ON ROOF CONDTION, ROOF SLOPE AND MATERIAL

OTHER: AVAILABLE WITH OTHER BASE OPTIONS FOR VARIOUS ROOF CONDITIONS.

PROVIDE ROOF SLOPE.

INSTALLATION: FASTEN THROUGH 12" ROOF FLANGE WITH FASTENERS PROVIDED. SEAL

WITH SEALANT FOR A WATERTIGHT INSTALLATION.

OPTIONS: AVAILABLE WITH LIGHTNING PROTECTION KIT. CONTINUE L.P. SYSTEM AS

PER LOCAL CODE BY QUALIFIED LIGHTNING PROTECTION INSTALLERS.

